


# Parker Single Acting Telescopic Cylinders

| PRODUCT PART NUMBER | MODEL         | A STROKE | B CLOSED | C OPEN | D    | E    | G    | H    | WEIGHT (lbs.) |
|---------------------|---------------|----------|----------|--------|------|------|------|------|---------------|
| 3771413320          | S63DC-101-107 | 107.56   | 48.38    | 155.94 | 2.00 | 7.00 | 2.00 | 2.00 | 256           |
| 3771413321          | S63DC-101-120 | 120.06   | 52.62    | 172.68 | 2.00 | 7.00 | 2.00 | 2.00 | 275           |
| 3771414059          | S64DC-14-156  | 156.00   | 53.62    | 209.62 | 2.00 | 7.25 | 2.00 | 1.75 | 310           |
| 3772514123          | S74DC-74-156  | 156.00   | 53.75    | 209.75 | 2.00 | 8.25 | 2.00 | 2.00 | 388           |
| 3772915166          | S85DC-66-190  | 190.00   | 54.62    | 244.62 | 2.00 | 9.50 | 2.00 | 2.00 | 555           |
| 3772915167          | S85DC-66-220  | 220.00   | 60.00    | 280.00 | 2.00 | 9.50 | 2.00 | 2.00 | 565           |
| 3772915161          | S85DC-66-235  | 235.00   | 64.62    | 299.62 | 2.00 | 9.50 | 2.00 | 2.00 | 650           |
| 3772915160          | S85DC-66-250  | 249.00   | 68.62    | 318.62 | 2.00 | 9.50 | 2.00 | 2.00 | 685           |
| 3772915165          | S85DC-66-265  | 265.00   | 71.00    | 336.00 | 2.00 | 9.50 | 2.00 | 2.00 | 715           |

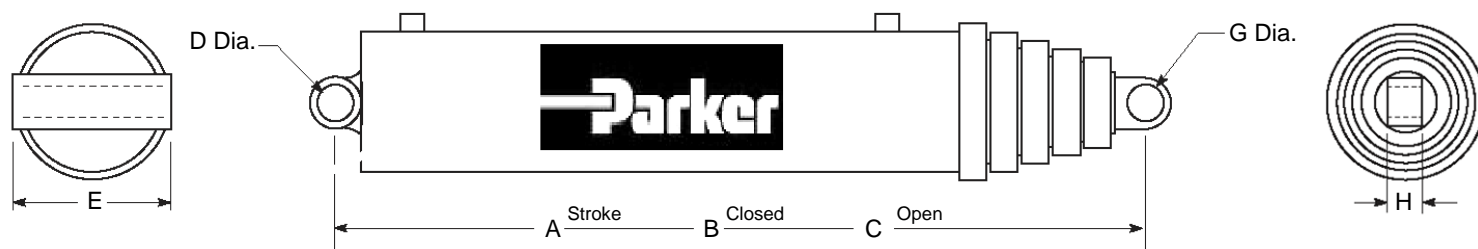

## CYLINDER MODEL NUMBER CODING

**S 8 5 D C - 66 - 250**

↑    ↑    ↑    ↑    ↑    ↑    ↑

①   ②   ③   ④   ⑤   ⑥   ⑦

1. S = Single-acting telescopic cylinder
2.    = Nominal O.D. of the largest moving stage
3.    = Number of moving stages in a telescopic cylinder
4.    = Mounting option on the body or base end of the cylinder  
D = Cross tube
5.    = Mounting option on the rod end of the cylinder  
C = Pin-eye drilled thru lug
6.    = Modification or design variation of the cylinder
7.    = Length of cylinder stroke in inches